

Vita X15

Features

- Fully Sealed IP65-Rated Stainless Steel Protection
- Compact 15" Display for Space-Constrained Workspaces
- Intel® Core™ Series 1 Industrial Performance
- Fanless Design for Long-Term Reliability
- High-Brightness Display for Enhanced Visibility
- Responsive 10-Point PCAP Multi-Touch Interface
- Integrated Cable Management for Cleaner Installations
- Flexible Wall, Pole, and VESA Mounting Support




Technical Specifications

Display	
LCD Size	15" (4:3)
Max. Resolution	1024 x 768
Brightness (cd/m ²)	400 cd/m ²
Contrast Ratio	1000:1
LCD Color	16.7M
Pixel Pitch (mm)	0.0642mm x 0.1790mm
Viewing Angle (H-V)	170°/170°
Backlight MTBF	50,000 hours
Touch	
Touch Screen	10-Point PCAP Multi-Touch Screen
Touch Controller	ILI 2511
System	
Processor	Intel® Core™ 5 processor 120U Intel® Core™ 7 processor 150U
System Chipset	Raptor Lake-P
Graphics Controller	Intel® UHD Graphics
LAN Chipset	Intel® I219-LM
Audio	Realtek ALC888S
System Memory	Up to 32GB DDR5 (1x SO-DIMM)
BIOS	Insyde 64Mbit
TPM	TPM 2.0 (fTPM)
vPro	Yes (Intel vPro® Essentials)
Storage	
M.2 NVMe	1x M.2 PCIe SSD
Expansion	
M.2	1x M.2 E Key (for WiFi/BT Communication Module, project based)
Other Features	
Cooling Method	Fanless
Internal Speaker	2x 2W Speakers
I/O	
Video	1× Type-C (DP + PD)
COM	2x RJ48 RS232 Serial Ports
USB	3x USB 2.0 Type A 3x USB 3.1 Type A
LAN	1x GbE LAN Port
WLAN	802.11a/b/g/n/ac + BT 5.0
Others	1× RJ11 cash drawer port (DC+12V or 24V by jumper setting, supports 2 cash drawers) 1× 4-pin DIN with lock for DC-IN

Operating System	
Windows	Windows 10/11 (64 bit)
Power	
Power Mode	AC Adapter
Power Input Voltage	19 VDC
Power Connector	4pin Mini DIN
Power Adapter	Input: 100 ~ 240VAC/ 50 ~ 60Hz Output: DC+19V, 90W AC to DC Adapter
Environment	
Operating Temp.	32°F to 104°F (0°C to 40°C)
Storage Temp.	-4°F to 140°F (-20°C to 60°C)
Relative Humidity	10% - 90% non-condensing
IP Level	IP65 (Full System)
Certification	CE/FCC/LVD
Physical	
Enclosure Materials	Stainless Steel
Dimension (W x H x D)	14.82" × 11.55" × 2.08" (376.4 x 293.4 x 52.8 mm)
Weight	Net Weight: 14.33lbs (4.8kg) Gross Weight: 17.64lbs (6.1kg)
Mounting	Wall / Pole / VESA 100mm x 100mm

Dimension

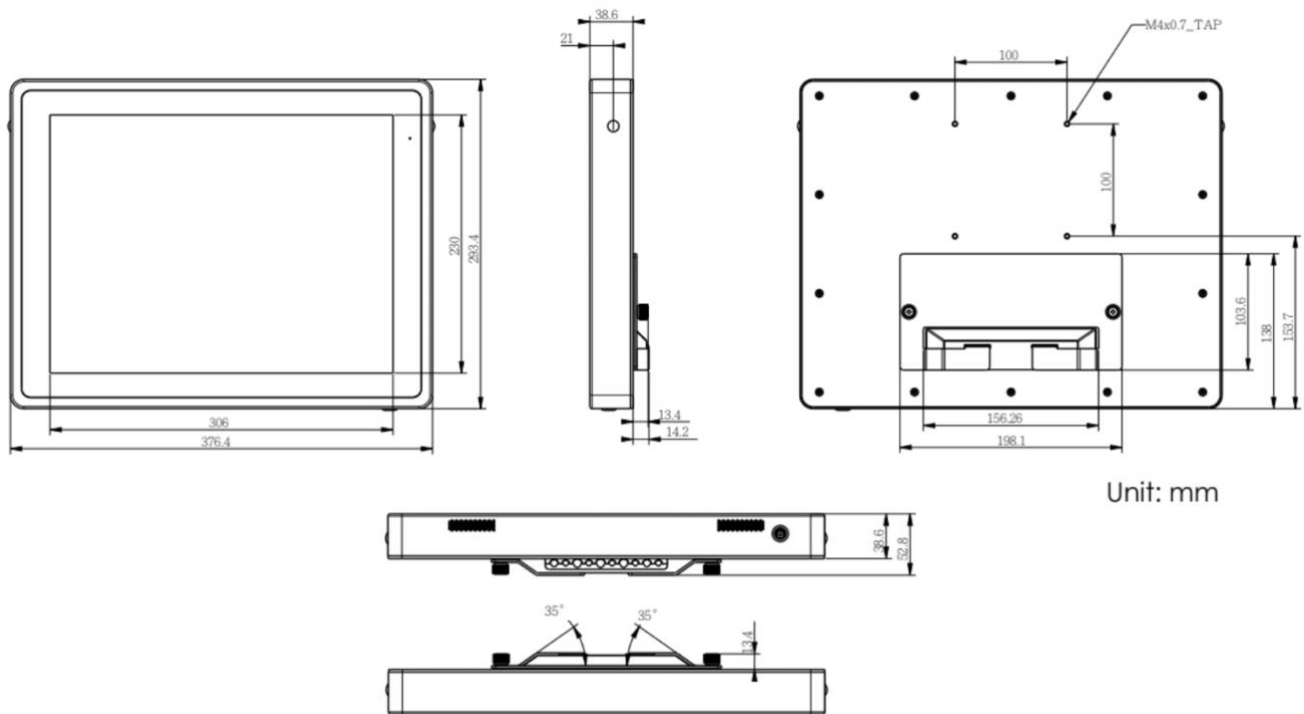

Other

